

Exfork

EP
Let's grow together

RSC082/122/152

Самоходный штабелёр с противовесом 800/1200/1500kg

- Универсальный штабелер для всех типов поддонов, коробов и клеток.
- Пропорциональная система подъема, обеспечивающая максимальную точность.
- Складная платформа для долгих поездок без усилий со стороны оператора.
- Высокий клиренс для плавного передвижения по неровным поверхностям.
- Компактные размеры для отличной маневренности.



Manufacturer			EP	EP	EP
Model designation			RSC082	RSC122	RSC152
Drive			Electric	Electric	Electric
Load capacity	Q	kg	800	1200	1500
Load center distance	c	mm	400	500	500
Service weight		kg	1760	1890	2160
Retracted mast height	h1	mm	2061	2061	2018
Lift height	h3	mm	3000	3000	3000
Length to face of forks	l2	mm	1334	1598	1898
Overall width	b1/b2	mm	900	900	900
Fork dimensions	s/e/l	mm	35*100*1070	35*100*1070	40*100*1070
Turning radius	Wa	mm	1250	1510	1707
Max. gradeability, laden/unladen		%	5/8	5/8	5/8
Travel speed, laden/unladen		km/h	5.5/6	5.5/6	5.5/6
Lifting speed, laden/unladen		m/s	0.13/0.2	0.13/0.2	0.13/0.2
Lowering speed, laden/unladen		m/s	0.16/0.15	0.16/0.15	0.16/0.15
Battery voltage/nominal capacity		V/Ah	24/210	24/210	24/210

Официальный дилер бренда EP-Equipment
www.ep-exfork.ru

V2409.02

Преимущества

■ Универсальный для различных размеров поддонов.

Серия RSC предоставляет всю универсальность для различных типов поддонов и грузов, что позволяет операторам транспортировать грузы нестандартных размеров. Это может способствовать ускорению оборота товаров и улучшению производительности. Кроме того, модели RSC122/152 предлагают чувствительное наклонение мачт по умолчанию, что обеспечивает большую удобство при штабелировании поддонов по сравнению с обычными штабелерами.

■ Пропорциональная система подъема, обеспечивающая максимальную точность.

Серия RSC оснащена пропорциональной системой подъема по умолчанию, что позволяет оператору более точно и мягко штабелировать и извлекать поддоны в многоуровневых стеллажах.



- **Высокий клиренс для плавного передвижения по неровным поверхностям.**

Серия RSC предлагает высокий клиренс 116 мм, что облегчает передвижение по неровным поверхностям.



- **Компактные размеры для отличной маневренности.**

Модели RSC082/122/152 имеют компактные размеры, с радиусом поворота 1250/1510/1707 мм, что позволяет легко маневрировать в узких проходах складских помещений.








Самоходный штабелёр с противовесом 800/1200/1500kg

RCS082/122/152

1.1	Manufacturer			EP	EP	EP
1.2	Model designation			RSC082	RSC122	RSC152
1.3	Drive			Electric	Electric	Electric
1.4	Operator type			Pedestrian	Pedestrian	Pedestrian
1.5	Load capacity	Q	kg	800	1200	1500
1.6	Load center distance	c	mm	400	500	500
1.8	Load distance, centre of drive axle to fork	x	mm	118	118	215
1.9	Wheelbase	y	mm	810	1074	1125
2.1	Service weight		kg	1760	1890	2160
2.2	Axle loading, laden front/rear		kg	570/1990	420/2670	440/3220
2.3	Axle loading, unladen front/rear		kg	1180/580	1110/780	1300/860
3.1	Tyre type			Polyurethane	Polyurethane	Polyurethane
3.2	Tyre size, front			230×90	230×90	230×90
3.3	Tyre size, rear			180×65	180×65	254×102
3.5	Wheels, number front/rear (x=drive wheels)		mm	1x/2	1x/2	1x/2
3.7	Tread width, rear	b ₁₁	mm	778	778	787
4.1	Tilt of mast/fork carriage forward/backward	α/β	°	—	—	1.5/7
4.2	Retracted mast height	h ₁	mm	2061	2061	2018
4.3	Free lift	h ₂	mm	—	—	150
4.4	Lift height	h ₃	mm	3000	3000	3000
4.5	Height, mast extended	h ₄	mm	3908	3908	3915
4.8	Seat height/standing height	h ₇	mm	148	148	148
4.19	Overall length	l ₁	mm	2404	2668	2968
4.20	Length to face of forks	l ₂	mm	1334	1598	1898
4.21	Overall width	b ₁ /b ₂	mm	900	900	900
4.22	Fork dimensions	s×e×l	mm	35×100×1070	35×100×1070	40×100×1070
4.23	A,B Fork carriage class/type A, B			2A	2A	2A
4.24	Fork carriage width	b ₃	mm	620	620	800
4.31	Ground clearance, laden, below mast	m ₁	mm	60	60	80
4.32	Ground clearance, center of wheelbase	m ₂	mm	116	116	116
4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2719	2979	3270
4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	2828	3088	3380
4.35	Turning radius	Wa	mm	1250	1510	1707
5.1	Travel speed, laden/unladen		km/h	5.5/6	5.5/6	5.5/6
5.2	Lifting speed, laden/unladen		m/s	0.13/0.2	0.13/0.2	0.13/0.2
5.3	Lowering speed, laden/unladen		m/s	0.16/0.15	0.16/0.15	0.16/0.15
5.8	Max. gradeability, laden/unladen		%	—	—	5/8
5.10	Service brake			Electromagnetic	Electromagnetic	Electromagnetic
5.11	Parking brake			Electromagnetic	Electromagnetic	Electromagnetic
6.1	Drive motor rating S2 60 min		kW	1.6	1.6	1.6
6.2	Lift motor rating at S3 15%		kW	2.2	2.2	3.0
6.4	Battery voltage/nominal capacity		V/Ah	24/210	24/210	24/210
6.5	Battery weight		kg	190	190	190
8.1	Type of drive control			AC	AC	AC
10.5	Steering design			Electronic	Electronic	Electronic
10.7	Sound pressure level at the driver's ear		dB(A)	74	74	74
15.1	Charger output current		A	30	30	30

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

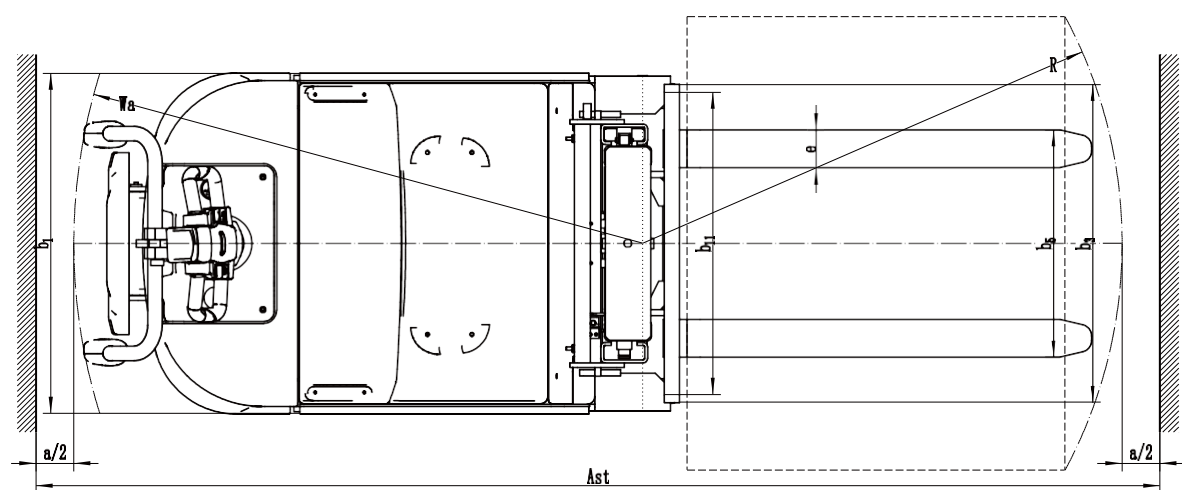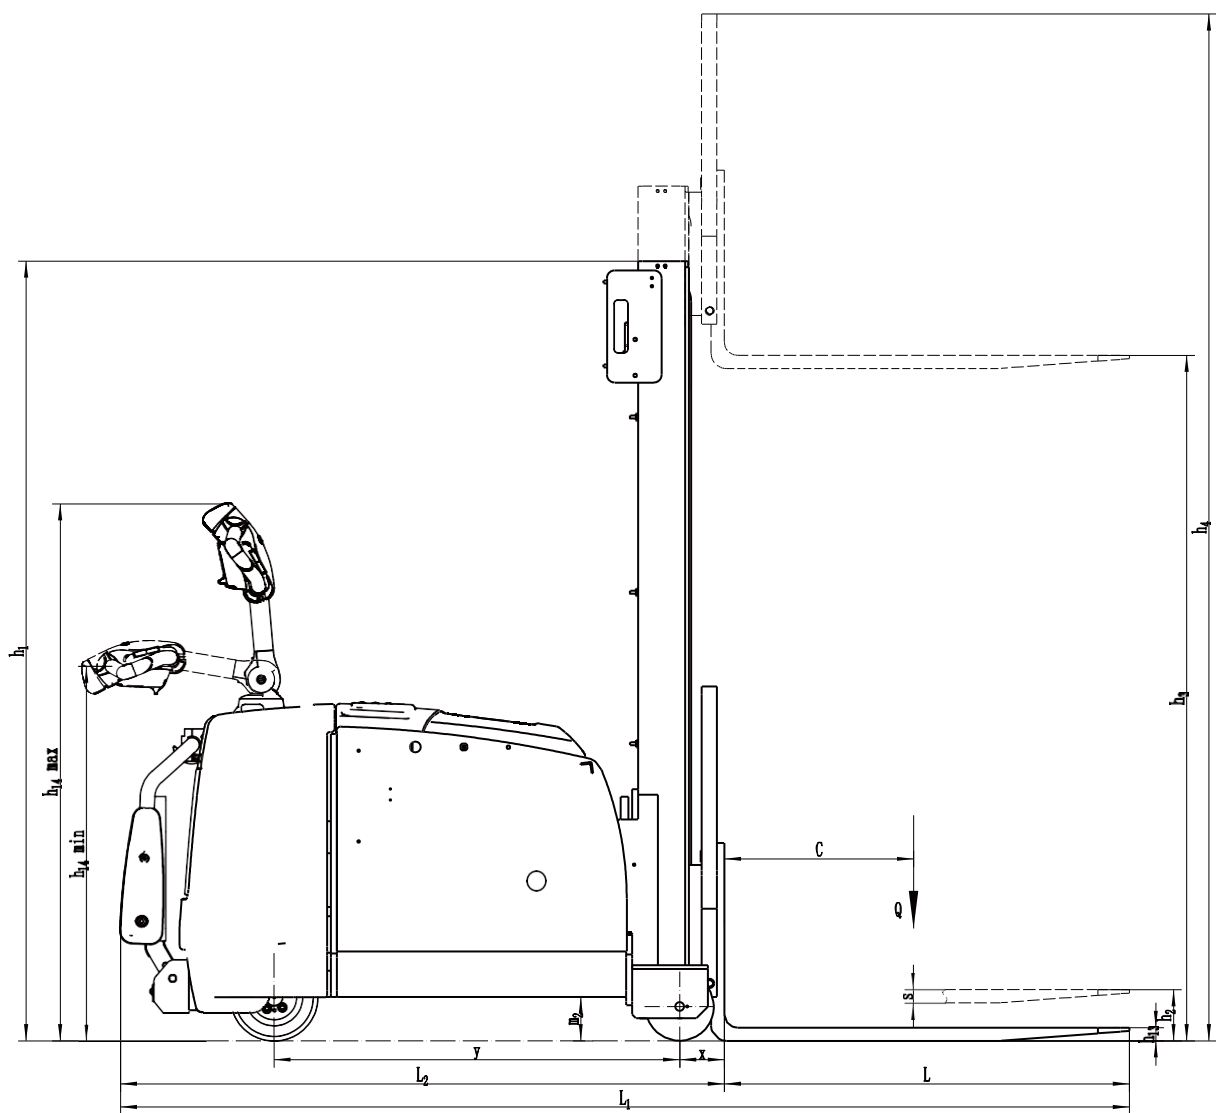

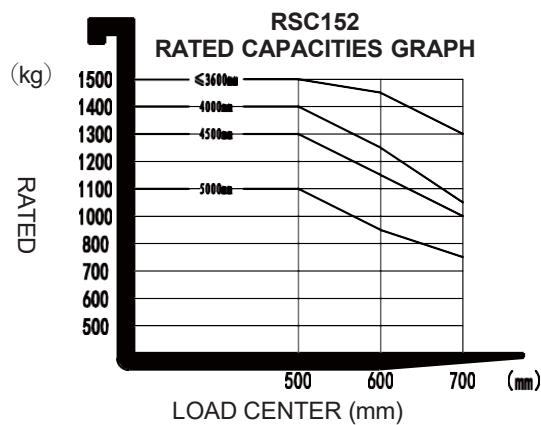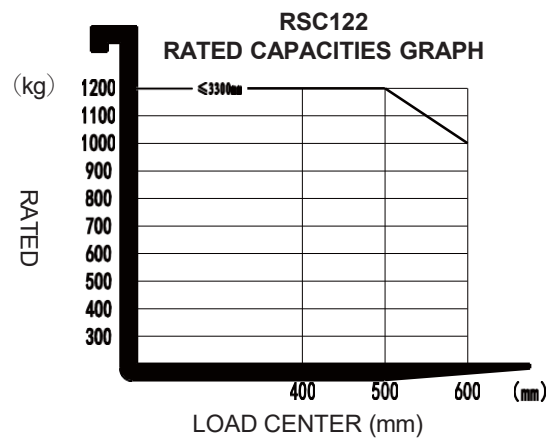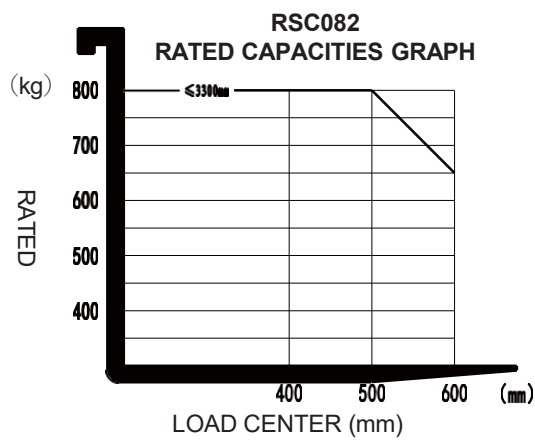

Mast Options

RSC082/122

Mast types	Lift height (h3)	Height, Mast		
		Height, mast lowered(h1)	Height, mast extended(h4)	
			No backrest	With backrest
	mm	mm	mm	mm
2-Standard Mast	2000	1561	2546	2908
	2500	1811	3046	3408
	2700	1911	3246	3608
	3000	2061	3546	3908
	3300	2211	3849	4211

RSC152

Mast types	Lift height (h3)	Height, Mast		Height, Free lift(h2)
		Height, mast lowered(h1)	Height, mast extended(h4)	With shelving
			With shelving	
	mm	mm	mm	mm
2-Standard Mast	2600	1838	3555	150
	3000	2018	3915	150
	3200	2118	4115	150
	3600	2303	4505	150
	3900	2453	4805	150
3-Free Mast	4000	1822	4915	904
	4500	2022	5415	1104
	4800	2122	5715	1204
	5000	2187	5915	1274

Option

Optional items	RSC082	RSC122	RSC152
Fork dimension	○ 900*600, 2A, 100*35*920 ● 900*600, 2A, 100*35*1070 ○ 900*600, 2A, 100*40*1150 ○ 900*600, 2A, 100*40*1220 ○ 900*600, 2A, 100*40*1370 ○ 900*600, 2A, 100*40*1520	○ 900*600, 2A, 100*35*920 ● 900*600, 2A, 100*35*1070 ○ 900*600, 2A, 100*40*1150 ○ 900*600, 2A, 100*40*1220 ○ 900*600, 2A, 100*40*1370 ○ 900*600, 2A, 100*40*1520	○ 900*600, 2A, 100*40*920 ● 900*600, 2A, 100*40*1070 ○ 900*600, 2A, 100*40*1150 ○ 900*600, 2A, 100*40*1220 ○ 900*600, 2A, 100*40*1370 ○ 900*600, 2A, 100*40*1520
Fork lowered height	● 60	● 60	● 60
Fork carriage width	● 620	● 620	● 780○915○1067○1220
Backrest height	● 762	● 762	● 915 (36in) ○1220 (48in)
Load wheel material	● PU	● PU	● PU
Drive wheel material	● PU	● PU	● PU
Battery capacity	● 210Ah ○ 205Ah (Li-ion)	● 210Ah ○ 205Ah (Li-ion)	● 210Ah○280Ah○345Ah ○ 205Ah (Li-ion)
Charger	● 24V-30A External (Lead Acid) ○ 24V-100A External (Li-ion)	● 24V-30A External (Lead Acid) ○ 24V-100A External (Li-ion)	● 24V-30A External (Lead Acid) ○ 24V-50A External (Lead Acid) ○ 24V-50A External (Li-ion) ○ 24V-100A External (Li-ion)
Battery indicator	● With hourmeter (Bluetooth)	● With hourmeter (Bluetooth)	● With hourmeter (Bluetooth)
Attachments	● No	● No	● No ○ External shifter ○ Fork positioner
Foldable fork	● No○Yes and can be customized	● No○Yes and can be customized	● No
Auto battery watering system	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Warning lamp	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Blue lamp	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Area warning lamp	● No○ Yes and not customized	● No○ Yes and not customized	● No○ Yes and not customized
Rearview mirror	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Buzzer	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Telematics	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Swipe card device	● No○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Pin Code	● No ○Yes and not customized	● No○Yes and not customized	● No○ Yes and not customized
Side supports	○ No●Yes and not customized	○ No●Yes and not customized	○ No● Yes and not customized
Foldable pedals	○ No●Yes and not customized	○ No●Yes and not customized	○ No● Yes and not customized
Proportional lift system	● Yes and not customized	● Yes and not customized	● Yes and not customized
Forks tilt forward and backward	● No○Yes and not customized	● Yes and not customized	● Yes and not customized
Note: ●Standard ○ Optional - Inconformity			



Официальный дилер бренда EP-Equipment
www.ep-exfork.ru